


L15B (linear lighting fixtures @ customized lengths, up & down lighting solution)



optional lighting directions:

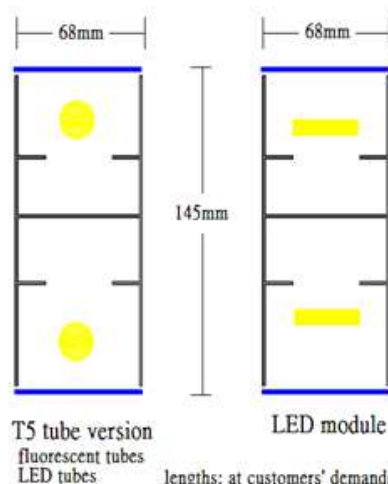

Features

High quality, fast installation

Easy maintenance

Material

Housing: Aluminum extrusions

Diffuser optional: opal PC

Finishing

Anodizing, silver gray,

white, black, etc.,

according to customers' color specimen

Applications

Commercial / Retail / Shops/Office/others

Lamp / Gear (on demand)

T5 tubes (LED / fluorescent) / LED module

TRIDONIC / OSRAM gears recommended

Accessories

End caps (aluminum die-casting),

suspension kits, blank parts,

straight connector, L, T & + shape connectors

Other specs

*IP20 rated

*Width: 68mm Height: 145mm **extrusions thickness: 2.0mm**, to prevent getting deformed


***Linear system lengths @ any customers' demand**, with either shadow-free solution or blank parts

***extrusion in one piece, not joint by upper and lower parts**

Warranty


2 years for fixtures excluding light source and gears

Connections

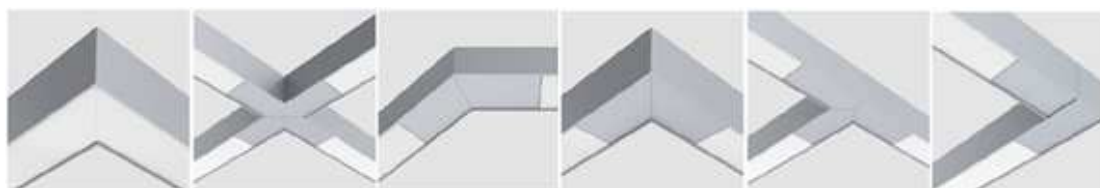

Project reference:





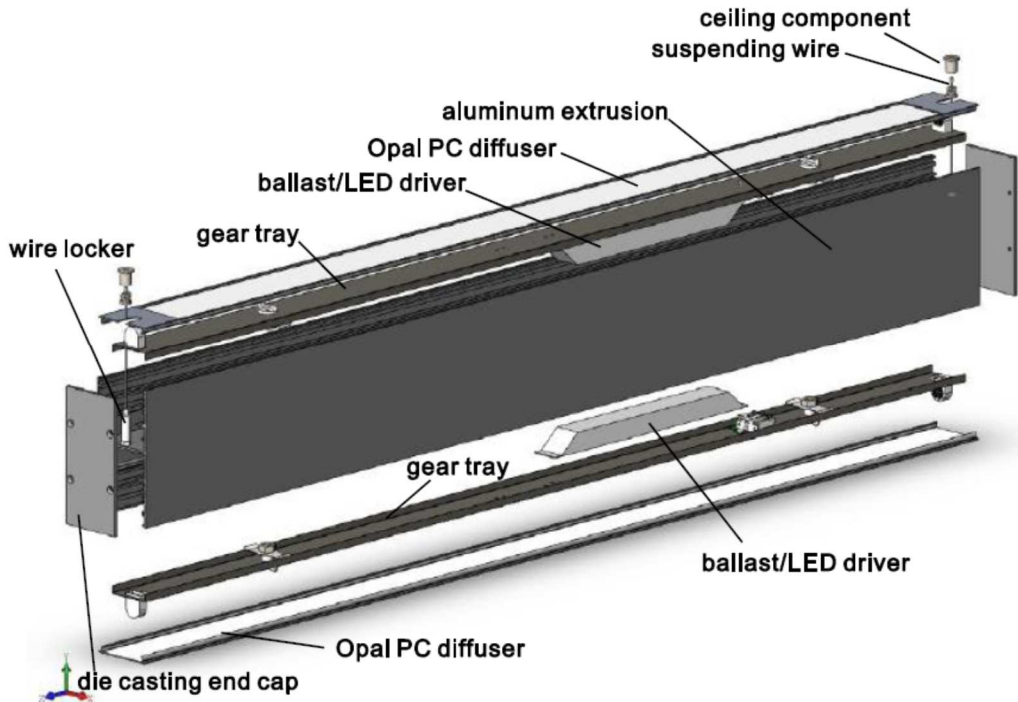

Connection:







90 degree connection:

straight connection:

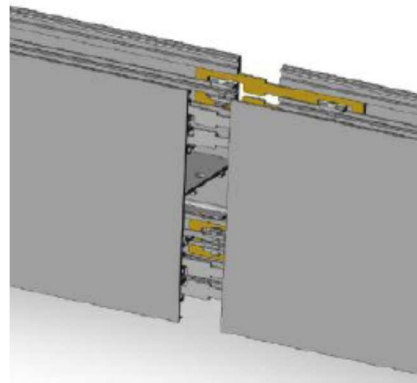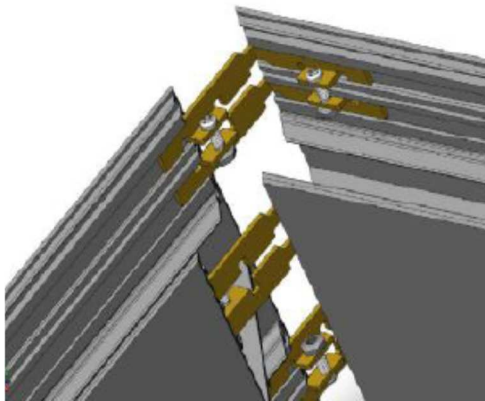

LED

T5 tubes:

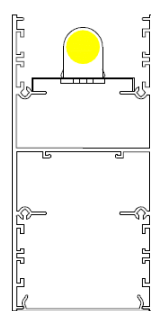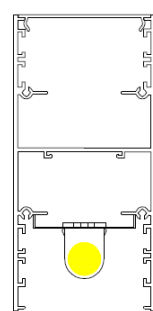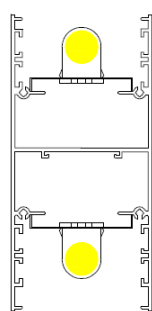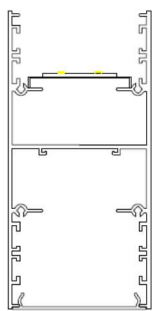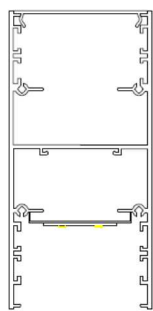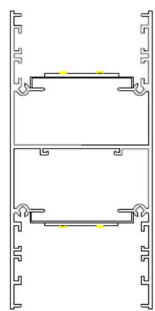

up and down

down

up

up and down

down

up

Specs for LED:


(CRI: 80 above, optional color temperatures: 3000k/4000k/5000k/6000k)

Size (mm)	system wattage (w)	system lumen output (lm)
600*68*145	23.80	1666lm
600*68*145	31.60	2212lm
900*68*145	34.80	2436lm
900*68*145	47.40	3318lm
1200*68*145	46.40	3248lm
1200*68*145	63.20	4424lm
1500*68*145	58.00	4060lm
1500*68*145	79.00	5530lm

Specs for T5 tubes:

Size (mm)	system wattage (w)	remark
600*68*145	1*14w	either up or down lighting
600*68*145	2*14w	both up and down lighting
900*68*145	1*21w	either up or down lighting
900*68*145	2*21w	both up and down lighting
1200*68*145	1*28w	either up or down lighting
1200*68*145	2*28w	both up and down lighting
1500*68*145	1*35w	either up or down lighting
1500*68*145	2*35w	both up and down lighting


Optional diffusers for T5 tubes version:

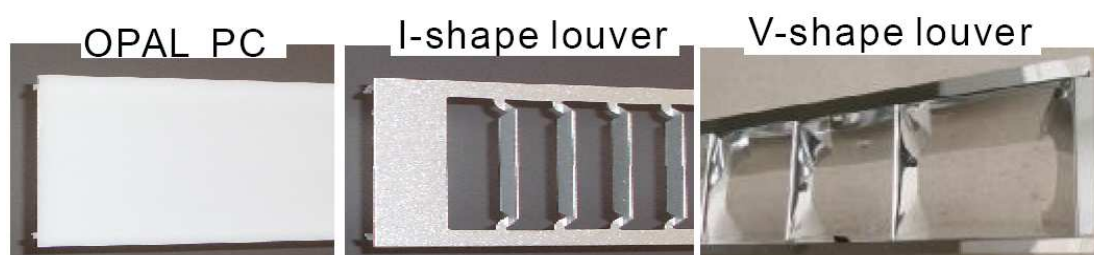

How to achieve the shadow-free solution by adoption of T5 tubes?

T5 tubes overlapped at reasonable distance.

See below

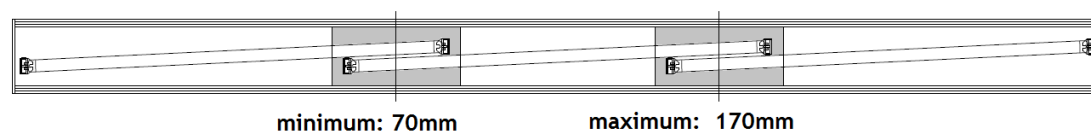**Please contact us, in case you need develop and improve other linear lighting fixtures.**